

RADIK VKU



Description


RADIK VKU model is a steel panel radiator in VENTIL KOMPAKT version which allows **left or right bottom connection** to the pressurized heating system. No hangers are welded on the back, so radiator types 21, 22, and 33 can be turned round.

Note:

Type 33 VKU does not have symmetrically placed connections with respect to the depth of the radiator.

When placing the radiator on the wall, it is necessary to use Compact Bracket Plus (see the KORAMONT catalogue).


Overview of types

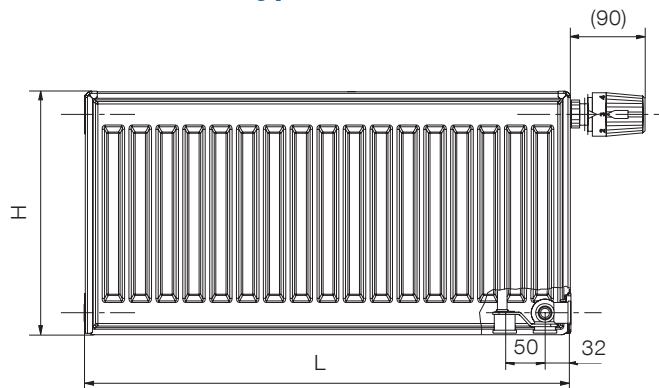


Technical data

Height H	300, 400, 500, 600, 700, 900 mm
Length L	400, 500, 600, 700, 800, 900, 1000, 1100, 1200, 1400, 1600, 1800, 2000, 2300, 2600, 3000 mm
Depth B	
Type 21 VKU	66 mm
Type 22 VKU	100 mm
Type 33 VKU	155 mm
Connecting pitch	50 mm
Connecting thread	6 x G1/2 inside
Highest allowed working pressure	10 bar
Highest allowed working temperature	110 °C
Radiator connection	right or left bottom


Type 21 VKU




Type 22 VKU




Type 33 VKU

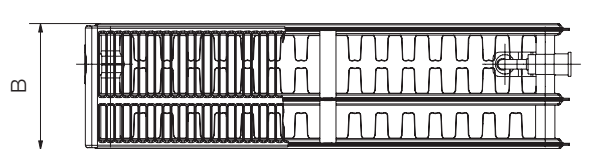

Examples of connection to the heating system



right bottom
 $\varphi = 1$



left bottom
 $\varphi = 1$